



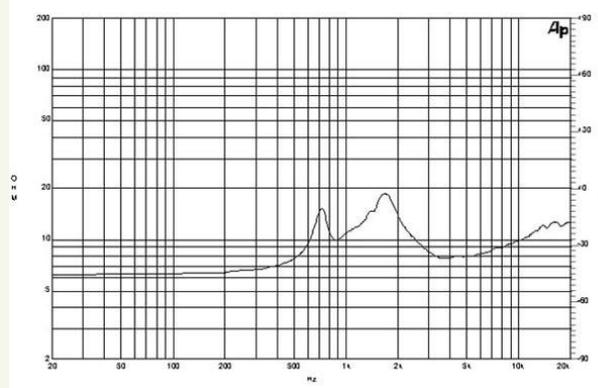

DE250 | HF Drivers

120 W continuous program power capacity
 1" horn throat diameter
 44 mm (1.7 in) aluminium voice coil
 Polyimide diaphragm
 1000 – 18000 Hz response
 108.5 dB sensitivity

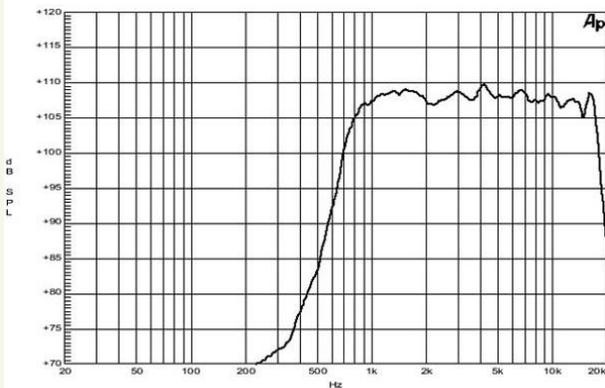

Specifications

Throat Diameter	25 mm (1 in)
Nominal Impedance	8 ohm
Minimum Impedance	7.8 ohm
Nominal Power Handling	60 W
Continuous Power Handling	120 W
Sensitivity (1W/1m)	108.5 dB
Frequency Range	1 -18 kHz
Recommended Crossover	1.6 kHz
Voice Coil Diameter	44 mm (1.7 in)
Winding Material	Aluminium
Inductance	0.11 mH
Diaphragm Material	Polyimide
Flux Density	1.85 T

Mounting and Shipping Info

Two M6 holes 180° on 76 mm (3 in) diameter	
Three M6 holes 120° on 57 mm (2.2 in) diameter	
Overall Diameter	120mm (4.7 in)
Depth	62 mm (2.4 in)
Net Weight (1 unit)	2.1 kg (4.6 lb)
Shipping Weight (8 units)	17.5 kg (38.5 lb)
Shipping Box (8 units)	260x260x190 mm (10.2x10.2x7.5 in)

Horns
 HF Drivers
 Coaxials
 LF Nd Drivers
 LF Drivers

